


### Horizontal Niches, Headwalls, Footwalls

A megatile consists of a piece of 1/4" tempered glass or 1/4" clear acrylic with artwork printed second surface, plus opaque backings. A megatile can be adhered directly to a wall or to most other substrates (permanent installation). Alternatively, a megatile can be affixed to a wall or substrate with wall-mount anchors and standoff caps (removable installation).

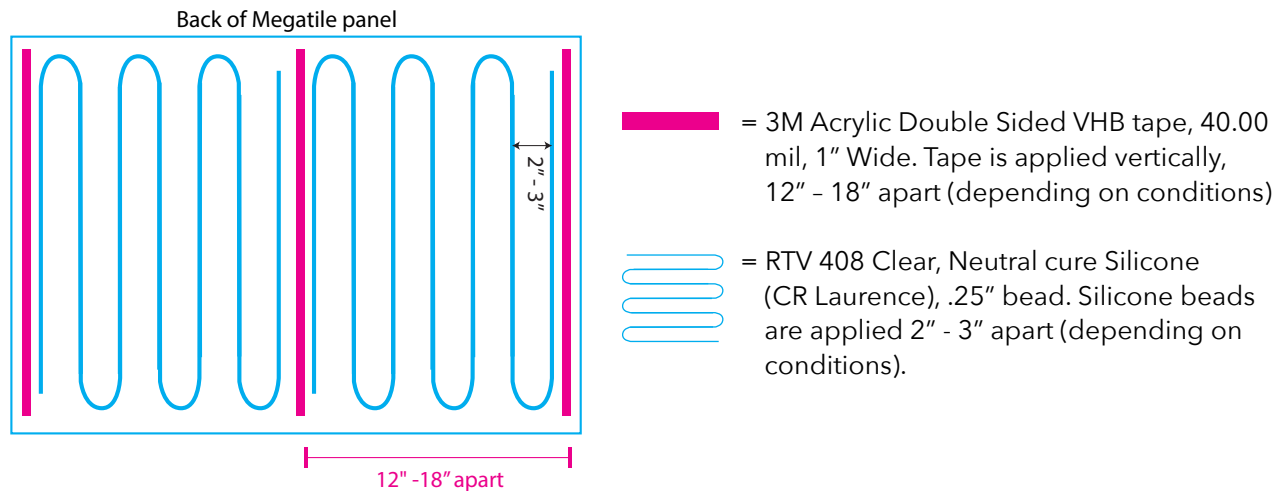

#### Process for Adhering Panels:

1. First, dry fit the panel(s) in the space.
2. Next, apply the VHB tape and silicone to Megatile.
3. Carefully adhere the panels to the wall (start at the bottom of the panel).
4. Some top and bottom capture is required to help hold the megatile in place.
  - Wall should be perfectly flat at a level 5 drywall finish.
  - Wall must also be primed and painted using a semigloss latex paint to accept VHB and silicone adhesives. Paint must be allowed to outgas for 10 days prior to application.
  - If opening is out of square, megatile can be produced out of square for an upcharge.

#### Process for Affixing Panels:

1. First, dry fit the panel(s) in the space.
2. Next, drill holes in the wall, and set wall-mount anchors.
3. Carefully place panels on wall-mount anchors, and secure with caps.
  - Wall should be flat at a level 4 drywall finish.
  - If opening is out of square, megatile can be produced out of square for an upcharge.

The following page provides a section view example of a horizontal Megatile wall with captures.

